

# AML 100


## Manual Resettable Emergency Call Point




### Specifications

» Buzzer	Set as silent, interval buzzing or continuous buzzing.
» Power Supply	DC 12V ~ DC24V $\pm$ 5%
» Operation Current	DC 12V: 18mA(standby)/75mA(operation) $\pm$ 5% DC 24V: 24mA(standby)/41mA(operation) $\pm$ 5%
» Indicator	Dual-Color(Red and Green). Red indicator to set blinking. off or on.
» Output	N.O N.C.&COM.Output(Maximum load of 125v/3A)
» Material	ABS . PC
» Dimensions	90L x 93W x 45H (mm)
» Weight	AML - 100 : 192g / AML - 110 : 208g (including wrapping)

Status display : Green

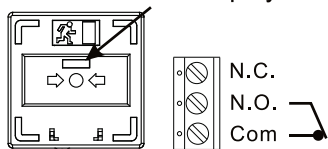


Status display : Red



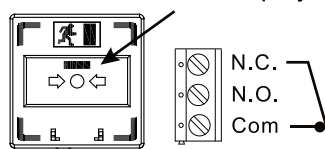


## Embedded Installation

Lateral view

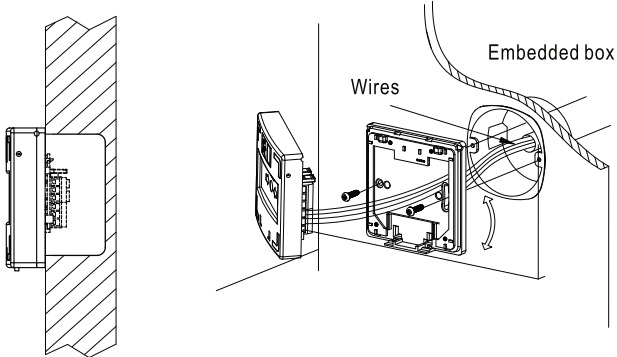

## Surface Installation

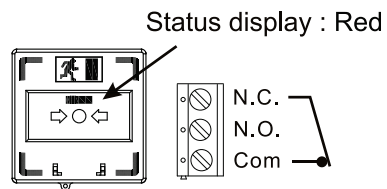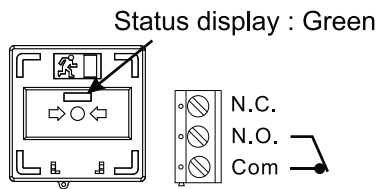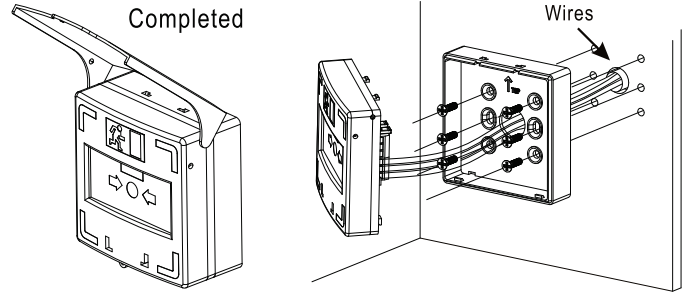

## APPLICABLE



**OFFICE**



**DATA ENTRY**



**HOTEL**



**BPO**



**CASH MANAGEMENT**



**SCHOOL**



**CUSTOM**



**BANK**