





# AMF 1400+

# Face Recognition

Access All Employees Attendance  
Securely With High Speed Long  
Range Face Recognition

		
Face Capacity <b>20,000</b>	Card Capacity <b>20,000</b>	PIN Capacity <b>20,000</b>

**with WiFi**

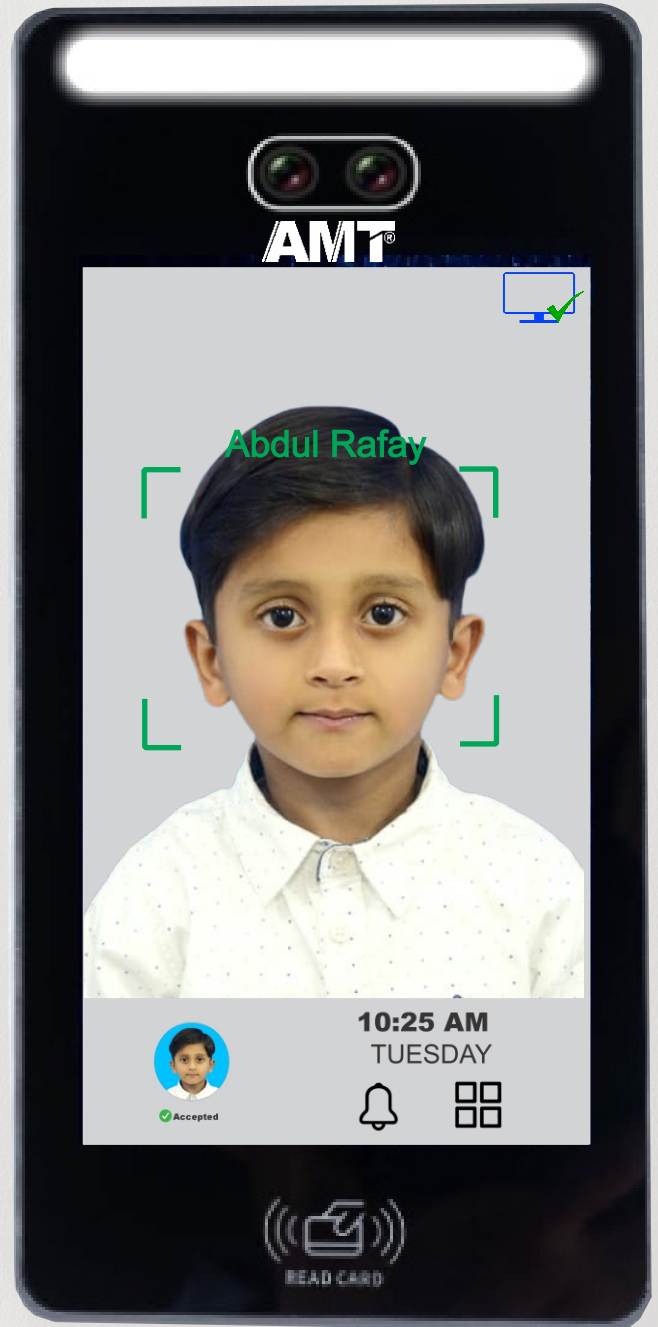

# 5.5" HD Touch Screen



20,000  
Face



20,000  
Pin



20,000  
Card



Access  
Control




TCP/IP



WiFi

With Free Cloud Software for Attendance and Access Control Report

# HIGH SPEED LONG RANGE FACE RECOGNITION

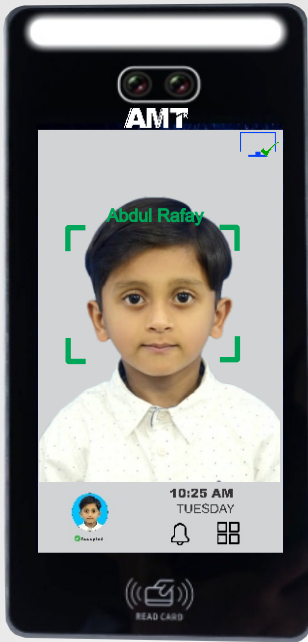

## Face Recognition Attendance Access Control System

### AMT 1400+

#### Specifications

» Face/Card/Pin	20,000
» Record Capacity	1000,000 Management
» LED	LED Double high power infrared light
» Display	5.5" Inch Capacitive LCD touch Screen
» Touch Screen Keypad	Yes
» Communication	TCP/IP, RS 485, Wiegand In/Out, RS 232, Wi-fi
» Type of Sensor	Facial
» Identification time	Min < 1 sec
» Resolution (dpi)	minimum 500
» Memory	Min 2 GB RAM + 16 GB Flash
» Power Supply	DC 12V, 2A
» Operating temperature	-15°C ~ +60°C
» Operating System	LINUX
» Camera	Dual Camera
» Light Condition	High Ambient Light Condition illumination up to 32000 Lux
» Face Recognition Time	<0.25
» Detection Range	8 Feet
» Wiegand	Wiegand In and Wiegand Out
» Dimension	185mm*110mm*20mm
» FAR	Min 0.0001 %
» FRR	Min 0.1 %
» Push & Pull Technology	Yes
» Real-time push technology	Yes
» Certificate	CE, BIS, FCC
» Dimensions	17.5*8.5*2cm



Face



TCP/IP



Personal  
Identity Number



GPRS  
(Optional)



RFID Reader



Access  
Control



Mask Detection



Helmet  
Detection



USB Disk



Cloud