


AMF 1700F

**AMT**<sup>®</sup>  
Innovation • Integrity • Profession

# AI FACE

RECOGNITION WITH FINGERPRINT READER

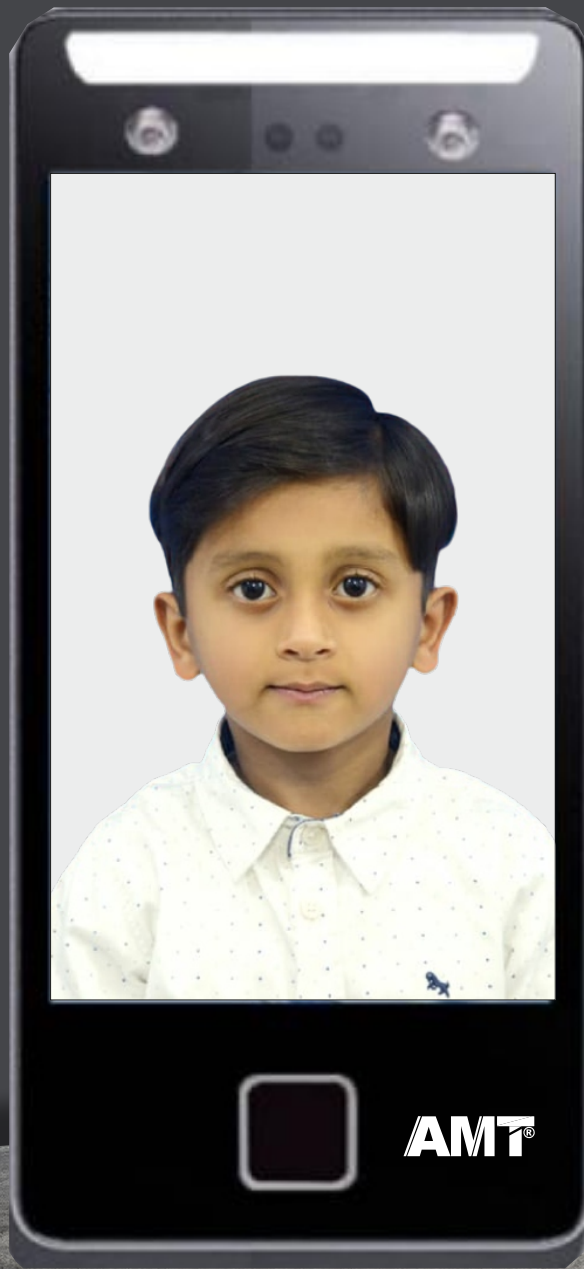

FACE  
CAPACITY  
**1000**

PIN/CARD  
CAPACITY  
**1000**

FINGER  
CAPACITY  
**5000**

PALM  
CAPACITY  
**500**


PRO SERIES WITH AI FACE RECOGNITION

FACE | CARD | PALM | WIFI | TCP/IP | ACCESS CONTROL | FINGER | USB DISK

# Long Range Face Recognition attendance & access control

# AMF 1700F

## 7" INCH TOUCH SCREEN

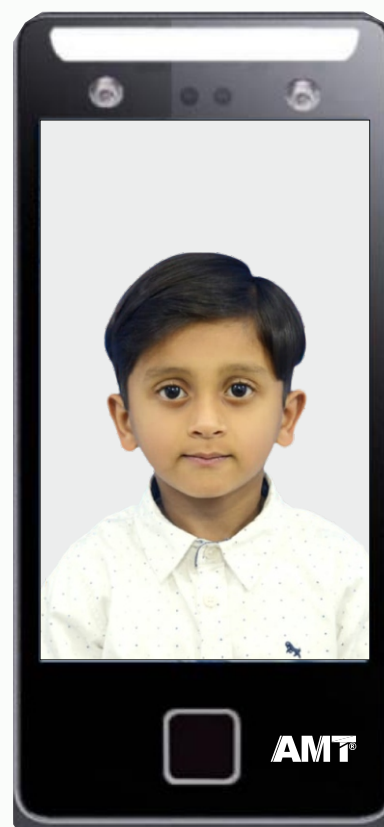

## PRODUCT PARAMETERS

Product	AMT Dynamic Face Recognition Access Control
Recognition Way	Face, Fingerprint, Palm, Card, Password
Face	1000
Fingerprint	5000
Password/Card	1000
Palm	500
Screen	7" Inch Touch Screen
Communication	TCP/IP, WiFi(optional), BS(Cloud)
Time Attendance	YES
WG OUT/IN	YES
WG 26/34	YES
Working Voltage	DC 12V
Working Current	580mA
Dimension	240*116*25mm



Face



Palm



RF Card



Access Control




TCP/IP



Wifi



Cloud Connectivity




USB Disk



OFFICE



DATA ENTRY



HOTEL



BPO




CASH MANAGEMENT



SCHOOL



CUSTOM



BANK

## 1. Product Parameters

<b>Dynamic recognition Access Control Machine</b>		
<b>Display</b>	<b>Screen</b>	7" capacitive touch screen
<b>Basic configuration</b>	<b>OS</b>	LINUX 3.10
	<b>CPU</b>	Quad-core 1.2G
	<b>Cameras</b>	1.3 million pixel infrared camera+1.3 million pixel color WDR wide dynamic binocular camera
<b>Identify capacity</b>	<b>Identify way</b>	Facial, palm, fingerprint, password, card
	<b>Face Capacity</b>	1000
	<b>Fingerprint capacity</b>	5000
	<b>Palm capacity</b>	500
	<b>Password &amp; card capacity</b>	1000
	<b>Logs capacity</b>	200000
	<b>RAM</b>	512MB
	<b>ROM</b>	4G
	<b>Identify speed</b>	0.3S
	<b>Identify distance</b>	Enable live detection at 0.3-2.8 meters
	<b>Live detection</b>	Eliminates to use photos and videos for check-in or out
<b>Interface</b>	<b>U disk</b>	USB2.0 x 1 to download & upload data
	<b>Power in</b>	DC12V x 1
	<b>Network</b>	Local network(TCP/IP or WIFI),cloud (BS)

<b>Attendance</b>	<b>Self-service</b>	U disk to download the attendance EXCEL report
	<b>Shift</b>	Can set shift in machine and use U disk to upload the shift
	<b>Software</b>	Free Ethernet attendance & access software
<b>Access control</b>	<b>Access</b>	Lock delay, sensor,door bell, NO, NC, external access control reader, Weigand 26/34 output, Weigand input
<b>Work environment</b>		Work temperature: -15°C ~ +45°C Work humidity: 20% ~ 90%
<b>Others</b>	<b>Bell</b>	Can set bell for attendance time, can add external bell
	<b>Fill light</b>	Supports infrared light, and the white fill light automatically lights up when a face is captured in low light
<b>Power</b>	<b>Working current</b>	Standby current: 300mA Working current: 360mA
	<b>Working voltage</b>	DC12V
<b>Install</b>	<b>Install way</b>	Wall mounted
<b>Weight</b>	<b>Net weight</b>	0.6 kg
	<b>Gross weight</b>	0.8kg
<b>Dimension</b>	<b>Device</b>	240x116x25mm
	<b>Color box</b>	290x160x65mm
<b>Carton</b>		Dimension: 530x310x34mm, 20pcs/carton, 16kg